

PENSTOCK - FORM SELECTION

WP SERIES FORM SELECTION

Date

Project Name

Customer Name

Quantity

PENSTOCK DESIGN

Wall opening width

Wall opening height


Invert to operating floor height

PRESSURE REQUIREMENTS

off-seating conditions

on-seating conditions

Installation depth



PENSTOCK MOUNTING

Wall mounted

In concrete

Standard wall mount

Flush bottom mount

MATERIAL PENSTOCK

Steel:

☐ stainless steel SS304

☐ stainless steel SS316Ti

☐ other:

sealing:

☐ EPDM

☐ NBR

☐ other:

PENSTOCK ACTUATION

☐ manual operated:

☐ stem square cap, square: ☐ mm

☐ hand wheel

☐ electrical:


available voltage: _____ V no of phases: _____

maximum available power: _____ kW

☐ pneumatic: available operating pressure: _____ bar

☐ hydraulic: available operating pressure: _____ bar

installation

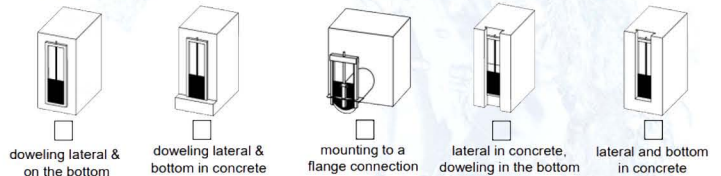

actuating:

☐ over ground

☐ under floor

☐ directly mounted on penstock

☐ perpendicular to the penstock

☐ mounted with offset to the penstock
offset: _____ mm

SPINDEL DESIGN

☐ compact-design

☐ modular design

☐ spindle out of the medium


☐ rising

☐ non-rising

☐ position indicator

☐ headstock with integrated position indicator

☐ VARIO position indicator



sealing performance

